


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/11/2009	SELLIS
B	TOL. CHANGE TO HEATSHRINK	08/11/2009	SELLIS
C	CHANGE LENGTH REF. POINTS	08/11/2009	SELLIS
D	ECN 10643 UPDATE TO NEW FORMAT	08/18/2020	SELLIS

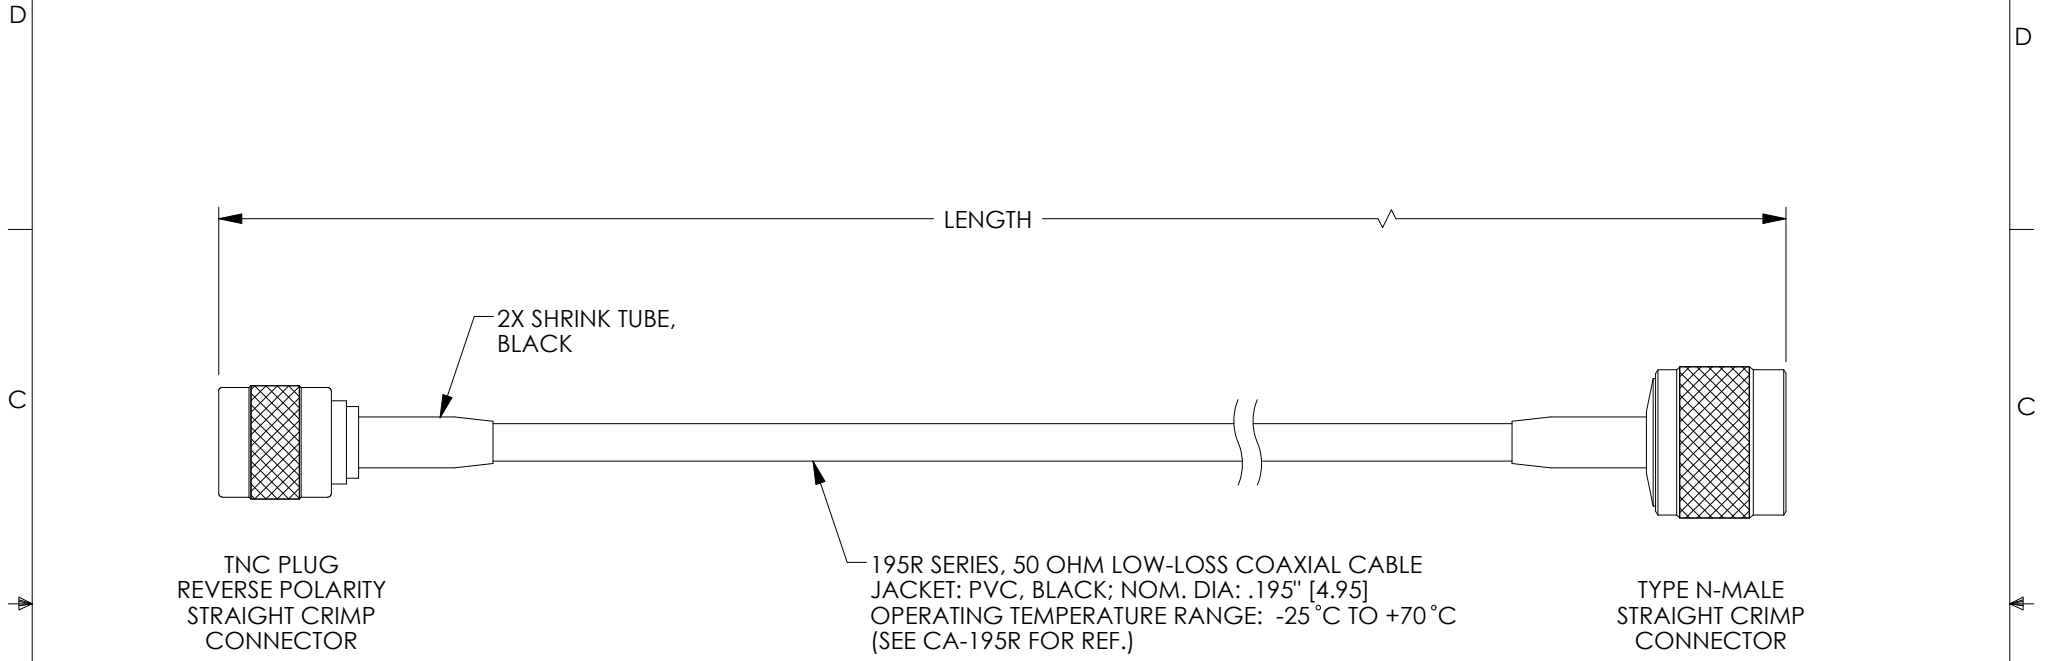

LENGTH CODE CHART		
CABLE# & LENGTH	LENGTH SYMBOL	EXAMPLES OF PART# USED
CA-RTPNMA $\underline{\text{XXX}}$	WHERE XXX = LENGTH IN FEET	CA-RTPNMA010 (10 FEET)
CA-RTPNMA $\underline{\text{NXX}}$	WHERE NXX = LENGTH IN INCHES	CA-RTPNMAN16 (16 INCHES)
CA-RTPNMA $\underline{\text{MXX}}$	WHERE MXX = LENGTH IN METERS	CA-RTPNMAM07 (7 METERS)
CA-RTPNMA $\underline{\text{XMX}}$	WHERE XMX = LENGTH IN DECIMAL METERS	CA-RTPNMA3M5 (3.5 METERS)

NOTES:

1. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
2. CABLE ASSEMBLY SHALL RECEIVE INSERTION LOSS TEST PER L-COM SPECIFICATIONS.
3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤ 12 [305] = +1 [25] / -0 > 12 [305] ≤ 60 [1524] = +2 [51] / -0 > 60 [1524] ≤ 120 [3048] = +4 [102] / -0 > 120 [3048] ≤ 300 [7620] = +6 [152] / -0 > 300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ [5] FRACTIONS $\pm 1/32$.XX = $\pm .02$ [.5] ANGLES $\pm 1^\circ$.XXX = $\pm .005$ [.13]	APPROVALS DRAWN BY BPUCHASKI	DATE 08/18/2020	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CHECKED BY DFRISIELLO	DATE 08/18/2020	
THIRD-ANGLE PROJECTION 	APPROVED BY SELLIS	DATE 08/18/2020	PRODUCT DESCRIPTION CA195R RTP - NM
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		COLOR VARIATIONS MAY OCCUR	SCALE: NONE CAD FILE: CA-RTPNMA.SLDRW
SIZE A	CAGE CODE 43321	DWG. NO. CA-RTPNMA	REV. D
			SHEET 1 OF 1